


Uninsulated Top Duct Cover

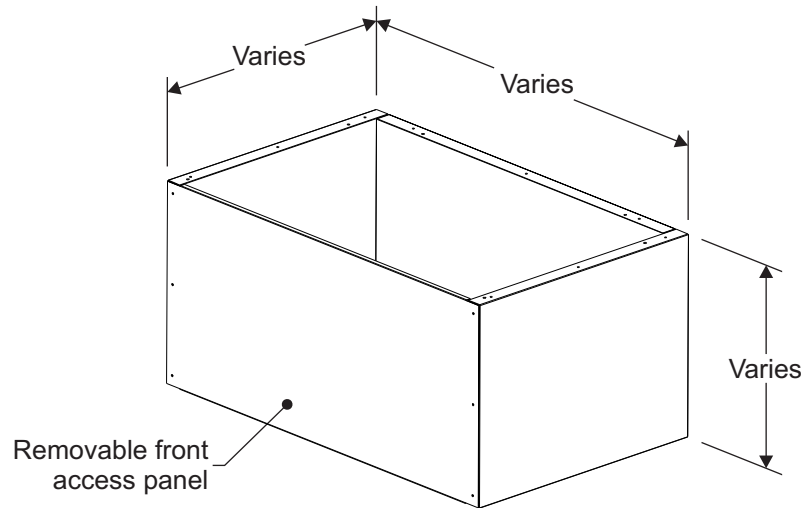

Standard Features:	Options:
Matches unit dimension, plus depth of accessory (if supplied) eg: Rear plenum	Width/depth/height can be adjusted
Finish will be the same as the unit	
Supplied uninsulated	For sound deadening: <ul style="list-style-type: none"> • 1" closed cell insulation • 1" fiberglass insulation with a black mat on the air side.
Removable front panel for easy access to piping connections and the electrical conduit.	

Design Consideration:

Ensure there are no obstructions that will interfere with the placement of the accessory.
Special consideration should be given to site conditions.